




SIGNRAYZ®

PRO160




ONEwhite®
Global Color Consistency



Capzul®
Waterproof Encapsulation



VersaLens®
Advanced Optics



CONSTANT CURRENT



UV RESISTANT



50,000 HRS
L70 LIFETIME



Ordering Information

Part Number	White Color Temperature	Number of Modules		Nominal Light Output (lm)*		
		per Foot	per Meter	per Module	per Foot	per Meter
LS-PRO160-ASW-2B1	AgiLight SignWhite	2	6.56	85	170	558
LS-PRO160-65K-2B1	6500K	2	6.56	85	170	558
LS-PRO160-57K-2B1	5700K	2	6.56	85	170	558
LS-PRO160-50K-2B1	5000K	2	6.56	85	170	558
LS-PRO160-45K-2B1	4500K	2	6.56	72	144	472
LS-PRO160-41K-2B1	4100K	2	6.56	72	144	472
LS-PRO160-30K-2B1	3000K	2	6.56	72	144	472
LS-PRO160-27K-2B1	2700K	2	6.56	72	144	472


*±10%

Product Ratings

Luminous Efficacy	109 lm/W
Max. Wattage per Module	0.82 W (0.78 W Nom.)
Input Current	0.065 A/module
Power Supply	Class 2: 5A, 60W 70 modules per power supply max.
Ingress Protection	IP68
Operating Temperature	-40°C to +60°C (-40°F to +140°F)
L70 Lifetime	50,000 hours
Warranty	5 Year limited*

Applications


- Large or medium channel letters
- Wide stroke channel letters
- Advertisement displays
- Dark vinyls
- Shallow channel letters
- Shallow box signs
- Cloud signs
- Logo boxes
- Push through acrylic
- Cove lighting
- Accent lighting

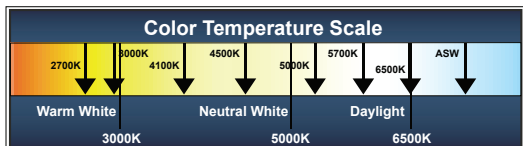

<p>General LED, Inc. 1074 Arion Circle, Suite 116 San Antonio, TX 78216 United States of America +1.866.482.0203</p>	<p>General LED Fze 822, Building 4EA Dubai Airport Free Zone Dubai, United Arab Emirates +971 4 7017901</p>
---	--

Luminous Intensity Distribution

B1 Batwing Beam Pattern

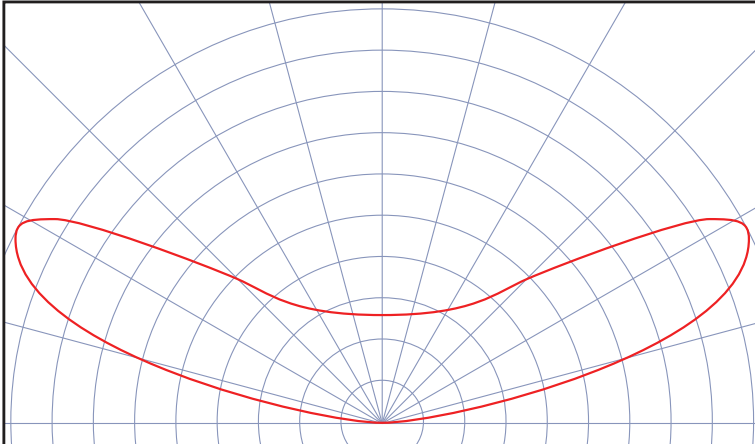

Population Density Guide¹

Channel Depth (inch / mm)	Max. Single Stroke (inch / mm)	Max. Multiple Row (inch / mm)
2 / 50	5 / 127 ²	5 / 127 ²
3 / 75	9 / 229 ³	8 / 203 ³
4 / 100	12 / 305	12 / 305
5 / 125	16 / 406	15 / 381
6 / 150	14 / 356 ⁴	16 / 406
7 / 180	12 / 305 ⁴	15 / 381 ⁴

¹ Modules are spaced with wires at full stretch, unless noted otherwise. 7328 White Acrylic was used for testing the face light uniformity; other face materials may vary the module and row spacing to achieve the same face light uniformity and brightness.

² Modules' center to center spacing is at 4" / 100 mm

³ Modules' center to center spacing is at 4.75" / 120 mm

⁴ Module spacing is determined to maintain ~600 lux at the sign face (7328 White Acrylic).

Power Supply Load Chart

Class 2 Power Supply	Maximum # of Modules per String	Total # of Modules	Total # of Feet	Total # of Meters
12W	14	14	7.0	2.1
60W	70	70	35.0	10.7

Class 1 Power Supply (Wired in parallel strings)	Maximum # of Modules per String	Total # of Modules	Total # of Feet	Total # of Meters
100W	70	115	57.5	17.5
150W	70	173	86.5	26.4
220W	70	254	127.0	38.7

Note: Wiring details in "Installation Guide: Wiring Instructions for Class 1 Power Supplies to LED Modules".


LED Module to Power Supply

Wire Size

Gauge (AWG)	Metric (mm ²)	Maximum Distance*	
		Feet	Meters
26	0.13	3	0.9
24	0.21	4	1.2
22	0.33	7	2.1
20	0.52	11	3.4
18	0.82	18	5.5
16	1.31	29	8.8
14	2.08	45	13.7
12	3.31	71	21.6
10	5.26	120	36.6

*Distance from power supply to load at full capacity

LED Module Dimensions

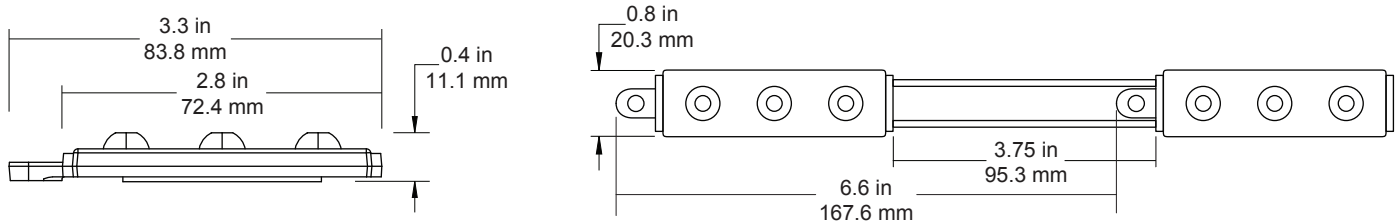

Shipping Information

Model	SKU	Tray Quantity	Box Quantity	Case Quantity	Case Weight	Box Dimensions			Case Dimensions		
						W	D	H	W	D	H
LS-PRO160-XXX-2B1	1 (ft)	20 (ft)	100 (ft)	500 (ft)	50 (lb)	20.7"	11.8"	5.1"	27"	21.1"	12.4"
	0.3 (m)	6.1 (m)	30.5 (m)	152.4 (m)	22.7 (kg)	525mm	300mm	130mm	685mm	537mm	315mm



CAUTIONS

1. These products are only suitable for connection to a Class 2 power source rated 12 Volt or less.
2. These products are intended for use only when connected to a power source that complies with Class 2 voltage and energy limited circuit.
3. When these units are connected to a Class 2 circuit, they are not to draw a total wattage of greater than the secondary or output rating of the Class 2 power supply.
4. These products may be secured in place in the end product by any means available.
5. These products are suitable for use in dry, damp, and wet locations. Not suitable for submersed applications.